




Case	:Metal
Bearing	:Sleeve Bearing
Operating Temp	:0°C~50°C
Rotation	:CW, CCW
Net Weight	:27g

- Resin gears for quiet operation and long life
- Planetary gearbox
- Special configurations available upon request

## Performance (Reference)

Model	Rated Voltage (DC)	Operating Voltage (DC)	Rated Current (mA)	Stall Current (mA)	Rated Torque		Stall Torque		rated speed (r.p.m.)	No Load Speed (r.p.m.)
					oz-in	g-cm	oz-in	g-cm		
HG16-060-AA	6	5.4~6.6	400	1600	4.86	350	21	1500	175	210
HG16-060-AB	12	10.8~13.2	200	800						

## Outline Dimensions

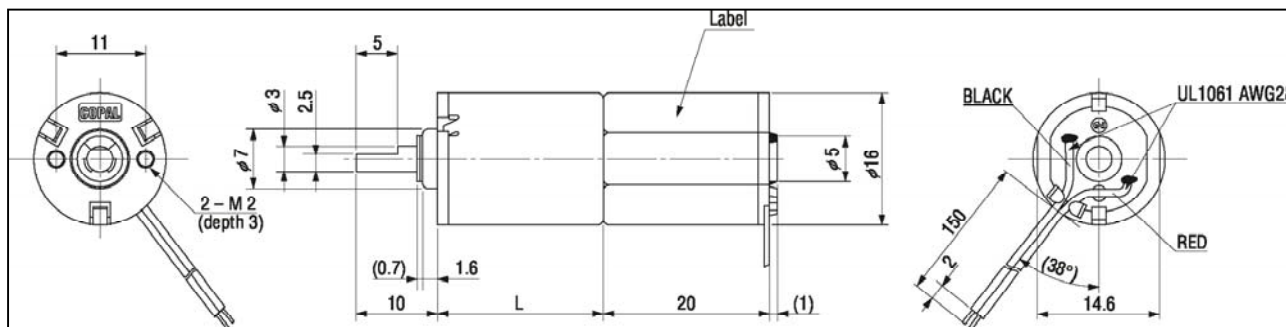

L= 20mm

NIDEC COPAL GmbH

Charlotten Str. 51, 40210 Duesseldorf, Germany

Phone: 49-211-550-469-0

Fax: 49-211-550-469-29

URL <http://www.nidec-copal-de.com/>

